

# GPM-8213

## Digital Power Meter

### FEATURES

- 4" TFT LCD
- Basic Accuracy :  $\pm(0.1\%$  of reading + 0.1% of range)
- Two Data Display Modes
  - Standard Display : Displaying Two Major Measurement Items + Six Minor Measurement Items
  - Simple Display : Displaying Test Data of Four Different Measurement Items
- Met the Requirement of IEC 62301 Power Measurement
  - Voltage/Current Test Frequency Bandwidth : DC ~ 6kHz
  - Watt Resolution : 1mW
  - Current Resolution : 0.1 $\mu$ A
  - Current/Voltage Measurements Reach CF=3 for Distorted Wave and CF=6 for Half Range
  - W-h Power vs Time/A-h Current vs Time Integration Function
  - Total Harmonic Distortion Measurement
- Front Panel Test Terminal
- Standard Interfaces : RS-232C, USB Device, LAN
- Optional Test Fixture : GPM-001

**GW INSTEK**  
Simply Reliable

GW Instek GPM-8213 power meter is designed specifically for single-phase (1P/2W) AC power supply's power measurements. Powerful features, including 4" TFT LCD, five-digit measurement display, 19 power measurement parameters, integral measurement function, high-accuracy voltage/current/power measurement capabilities, front/rear panel input terminals, and various communications ports, are to facilitate users with clear, convenient, and accurate power measurements.

GPM-8213 provides as many as 19 power measurement parameters, including voltage (Vrms/V+pk/V-pk), current (Irms/I+pk/I-pk), frequency (VHz/IHz), power (P/P+pk/P-pk), crest factor (CFV/CFI), apparent power (VA), reactive power (VAR), power factor (PF), phase angle (DEG), total harmonic distortion (THDV/THDI), high-accuracy voltage/current/power measurement capabilities (reading: ±0.1%; level: ±0.1%). The advantages of TFT LCD have been efficiently deployed to simple mode and standard mode. Simple mode displays conventional power meter's four measurement parameters to meet the requirement of accuracy and clarity for the test on manufacturing process. Standard mode extends the display to the maximum of 8 measurement parameters (2 major measurements + 6 monitor measurements) to satisfy the various measurement application requirements of R&D, design, and quality verification.


For DUT requiring IEC 62301/EN 50564 standby power consumption test, GPM-8213 provides the optimal measurement supports, including test frequency bandwidth of DC~6kHz, the minimum current level of 5mA (resolution: 0.1uA), power measurement resolutions (1uW for minimum current and voltage levels; 1mW for maximum current and voltage levels), crest factor reaching 3 (half range reaching 6), and measurement of total harmonic distortion (at least 13th order power harmonic). For large voltage/large current measurement applications of general power measurement, GPM-8213 provides PT/CT rate function to collocate with external potential transformer or current transformer to meet the measurement requirements.

With respect to data retrieval and storage, the standard RS-232C/USB interfaces (virtual COM)/LAN can be utilized to edit and retrieve programs or the optional GPIB interface (installed by manufacturer) can be selected to meet users' automatic test system requirements.

### PANEL INTRODUCTION









1. 4" TFT LCD
2. Display 8 Measurement Items or 4 Measurement Items Depends on Mode Selection
3. Operation Key
4. Navigator Key
5. Front Panel Input Terminal (<10A)
6. Rear Panel Input Terminal
7. Standard Interfaces : RS-232C, LAN, USB Device
8. Optional Interface : GPIB
9. Universal Input Power

### A. TWO DISPLAY MODES



**Standard Mode (Setting & 8 Measurements)**



**Simple Mode (4 Measurements)**

GPM-8213 provides two display modes so as to maximize users' measurement effectiveness. Standard mode: simultaneously displays 8 measurement parameters (2 major measurements + 6 secondary

measurements) and related measurement setting parameters; ideal for R&D, design, and engineering verification. Simple mode: displays four measurement parameters; ideal for production tests.

## B. VARIETY OF MEASUREMENT PARAMETERS

MEASUREMENT ITEMS	Symbols
Voltage	Vrms, V+pk, V-pk, Vdc*
Current	Irms, I+pk, I-pk, Idc*
Power	P, P+pk, P-pk, VA, VAR
Power Factor	PF
Crest Factor	CFV, CFI
Phase Angle	DEG
Frequency	VHz, IHZ
Total Harmonic Distortion	THDV, THDI
INTEGRATION	WP, WP+, WP-, q, q+, q-


Note : \* \* Vdc/Idc is selectable only when measurement mode DC is selected



Comparing with products of the same category, GPM-8213 provides more diverse measurement items and functions, including voltage, current, frequency, active power, apparent power, reactive power, power factor, crest factor, and total harmonic distortion


measurement. GPM-8213 also features the integral measurement function for DUT's power or current time. Users can set a time period to execute the transient power integration and divide the result by time to receive DUT's average power.

## C. OPTIAML MEASUREMENT CAPABILITIES

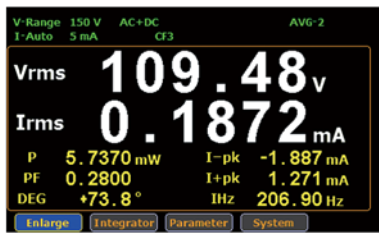

### Low Current Range & High Resolution

For IEC 62301/EN 50564 standby power consumption test requirement, GPM-8213 can fully meet the demand by its features, including measurement frequency bandwidth of DC~6kHz, minimum current level of 5mA (resolution: 0.1uA), power measurement resolutions (1uW for minimum current and voltage levels; 1mW for maximum current and voltage levels). Beyond that, time resolution for integral measurement is one second.

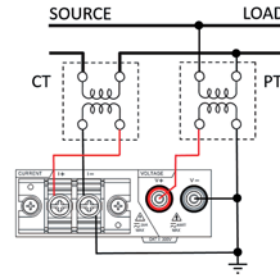

### PT/CT Connection

With respect to large power measurement, users can utilize terminal on the rear panel to conduct 600V/20A measurement. Users can also use external potential transformer/current transformer for measurement and collocate with PT/CT to set multiplying factor (1~9999) to change readings to the original input voltage or current values without the trouble of additional calculation.

## D. VARIOUS STANDARD INTERFACES



The various practical interfaces, RS-232/USB device/LAN, are equipped as standard making control convenient and flexible for

remote control and measurement result collection. Also, GPIB is available as optional.

## SPECIFICATIONS

### MEASUREMENT CHARACTERISTICS

#### INPUT

ITEM RATING VOLTAGE	Voltage	Range
RATING CURRENT		600 Vrms
IMPEDANCE(50/60Hz)	Current	20 Arms
		2.4 MΩ
MAXIMUM VOLTAGE	Cutoff frequency	5mA~200mA: 500 mΩ
MAXIMUM CURRENT		0.5A~20A: 5 mΩ
MAXIMUM COMMON MODE VOLTAGE		700 Vrms
LOW PASS FILTER		25 Arms
		300 V
		500 Hz

#### PARAMETERS

ITEM MEASUREMENT	Voltage	Symbol
	Current	Vdc, Vrms, V+pk, V-pk
	Power	I <sub>dc</sub> , I <sub>rms</sub> , I+pk, I-pk
	Crest Factor	P, P+pk, P-pk, VA, Var
	Power Factor	CFV, CF1
	Frequency	PF
	Angle	VHz, IHz
	Total Harmonic Distortion	Deg
	Distortion	THDV, THDI
	Integration	Time, WP, WP+, WP-, q+, q-, q-
DISPLAY DIGITS		5 digits
FREQUENCY BANDWIDTH		DC, 45Hz~6kHz
AVERAGE		1, 2, 4, 8, 16, 32, 64
PT RATE		1 ~ 9999.999
CT RATE		1 ~ 9999.999
DISPLAY MODE	Standard	8 measurement Item
	Simple	4 measurement Item

#### VOLTAGE

ITEM RANGE	CF=3	Range
	CF=6	15V, 30V, 60V, 150V, 300V, 600V
CREST FACTOR		7.5V, 15V, 30V, 75V, 150V, 300V
ACCURACY	Effective Range	3 or 6 (selectable)
	DC	1% ~ 105% of range
	45Hz ≤ f ≤ 66Hz	±(0.2% of reading+0.2% of range)
	66Hz < f ≤ 1kHz	±(0.1% of reading+0.1% of range)
	1kHz < f ≤ 6kHz	±(0.1% of reading+0.2% of range)
TEMPERATURE EFFECT	Filter(ON)	±3% of reading
RESIDUAL NOISE	5-18° C / 28-40° C	Add 0.3% of reading@45Hz ~ 66Hz
		Add ±0.03% of reading/° C
		0.5% of range

### CURRENT

ITEM MEASUREMENT	CF=3	Range
	CF=6	5mA, 10mA, 20mA, 50mA, 100mA, 200mA, 500mA, 1A, 2A, 5A, 10A, 20A
CREST FACTOR		2.5mA, 5mA, 10mA, 25mA, 50mA, 100mA, 250mA, 0.5A, 1A, 2.5A, 5A, 10A
ACCURACY	Effective Range	3 or 6 (selectable)
	DC	1% ~ 105% of range
	45Hz ≤ f ≤ 66Hz	±(0.2% of reading+0.2% of range)
	66Hz < f ≤ 1kHz	±(0.1% of reading+0.1% of range)
	1kHz < f ≤ 6kHz	±(0.1% of reading+0.2% of range)
TEMPERATURE EFFECT	Filter(ON)	±3% of reading
RESIDUAL NOISE	5-18° C / 28-40° C	Add 0.3% of reading@45Hz ~ 66Hz
		Add ±0.03% of reading/° C
		0.5% of range

#### POWER

ITEM ACCURACY	Effective Range	Range
	DC	1% ~ 110% of range
	45Hz ≤ f ≤ 66Hz	±(0.2% of reading+0.2% of range)
	66Hz < f ≤ 1kHz	±(0.1% of reading+0.1% of range)
	1kHz < f ≤ 6kHz	±(0.1% of reading+0.3% of range)
TEMPERATURE EFFECT	Filter(ON)	±3% of reading
	5-18° C / 28-40° C	Add 3% of reading@45Hz~66Hz
		Add ±0.03% of reading/° C

#### FREQUENCY

ITEM MEASUREMENT	Filter(ON)	Range
	Filter(OFF)	30.000 Hz~499.99 Hz
PARAMETER		30.000 Hz~9.9999 kHz
EFFECTIVE RANGE		Voltage, Current
ACCURACY		10%~105% of voltage input
		±0.06% of reading

#### INTEGRATION

ITEM INTERGRATION TIME	Accuracy	Range
	Range	±(voltage or current accuracy+0.1% of reading)
	Accuracy	0 hour 00 min ~ 9999 hour 59 min
		±0.01%±1second

### GENERAL INFORMATION

DISPLAY	4" TFT LCD
STANDARD INTERFACE	RS-232C, USB device, LAN
POWER SOURCE	AC 100~240 V, 50-60Hz
POWER CONSUMPTION	Max. 25VA
DIMENSION & WEIGHT	270(W) x 110(H) x 350(D) mm, Aapprox. 2.9kg

Specifications subject to change without notice. PM-8213CD1BH

### ORDERING INFORMATION

GPM-8213 with GPIB	Digital Power Meter (RS-232C/USB device/LAN/Opt.01 GPIB)
GPM-8213	Digital Power Meter (RS-232C/USB device/LAN)

### ACCESSORIES


Safety Sheet x 1, Power Cord x 1, Test Lead GTL-209 x 2  
CD x 1 (User manual/ USB driver)

### OPTION

Opt.01 GPIB card (factory installed)

### OPTION ACCESSORIES

GPM-001	Test Fixture
GTL-232	RS-232 Cable, 9-pin Female to 9-pin, null Modem for Computer
GTL-246	USB Cable, A-B type, approx. 1200mm
GTL-248	GPIB Cable, approx. 2000mm
GTL-251	GPIB-USB-HS+ (high Speed)
GRA-422	Rack Adapter Panel (19", 2U)



GPM-001 Test Fixture



GPM-001(EU) Test Fixture



GTL-213 Test Lead



GTL-210 Test Lead

Global Headquarters

#### GOOD WILL INSTRUMENT CO., LTD.

No. 7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan  
T +886-2-2268-0389 F +886-2-2268-0639  
E-mail: marketing@goodwill.com.tw

China Subsidiary

#### GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China  
T +86-512-6661-7177 F +86-512-6661-7277

Malaysia Subsidiary

#### GOOD WILL INSTRUMENT (SEA) SDN. BHD.

No. 1-3-18, Elit Avenue, Jalan Mayang Pasir 3,  
11950 Bayan Baru, Penang, Malaysia  
T +604-6111122 F +604-6115225

Europe Subsidiary

#### GOOD WILL INSTRUMENT EURO B.V.

De Run 5427A, 5504DC Veldhoven, THE NETHERLANDS  
T +31(0)40-2557790 F +31(0)40-2541194

U.S.A. Subsidiary

#### INSTEK AMERICA CORP.

5198 Brooks Street Montclair, CA 91763, U.S.A.  
T +1-909-399-3535 F +1-909-399-0819

Japan Subsidiary

#### TEXIO TECHNOLOGY CORPORATION.

7F Towa Fudosan Shin Yokohama Bldg., 2-18-13 Shin  
Yokohama, Kohoku-ku, Yokohama, Kanagawa,  
222-0033 Japan  
T +81-45-620-2305 F +81-45-534-7181

Korea Subsidiary

#### GOOD WILL INSTRUMENT KOREA CO., LTD.

Room No.503, Gyeonginro 775 (Mullae-Dong 3Ga,  
Ace Hightech-City B/D 1Dong), Yeongduengpo-Gu,  
Seoul 150093, Korea.  
T +82-2-3439-2205 F +82-2-3439-2207

India Subsidiary

#### GW INSTEK INDIA LLP.

No.2707/B&C, 1st Floor UNNATHI Building,  
E-Block, Sahakara Nagar, Bengaluru-560 092. India  
T +91-80-6811-0600 F +91-80-6811-0626

# GW INSTEK

Simply Reliable



Website



Facebook



LinkedIn