


Test Leads



- **Wire :** PVC UL 1803 / 18AWG.
length : 1100 ± 30 mm
Out diameter : 4.0mm
Temperature tolerance range : $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$
Braid copper wires : 170 / 0.08mm
- **Terminal :**
4mm with brass nickel plated
- **Rating :**
EN 61010-031:2002 + A1:2008
CAT IV 1000V 10A

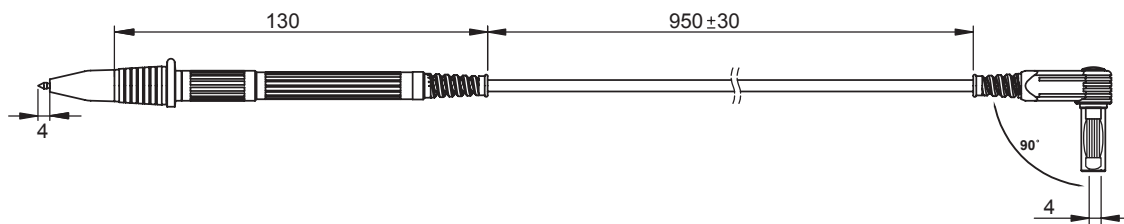